


Selhurst Sports Arena

Refurbishment of an Artificial Turf Pitch

- NOTES
- 1 - DO NOT SCALE FROM DRAWING. ALL DIMENSIONS TO BE CHECKED ON SITE PRIOR TO COMMENCEMENT OF WORKS.
 - 2 - THIS DRAWING IS COPYRIGHT TO SURFACING STANDARDS LTD
 - 3 - ALL PERSONNEL SHOULD BE AWARE OF THE HEALTH AND SAFETY PLAN WHICH IS RETAINED IN THE SITE MANAGERS OFFICE.

- 3G Artificial Turf Playing Area
- 3G Artificial Turf Run Off Area
- Existing Macadam Areas to be Retained
- Position of Existing Floodlighting Columns to be Retained
- Existing 4.8m High Fence (to be refurbished as per one of the below options)
- Existing 4m High Fence (to be refurbished as per one of the below options)
- Existing 1.2m High Spectator Rail Fence (to be refurbished as per one of the below options)

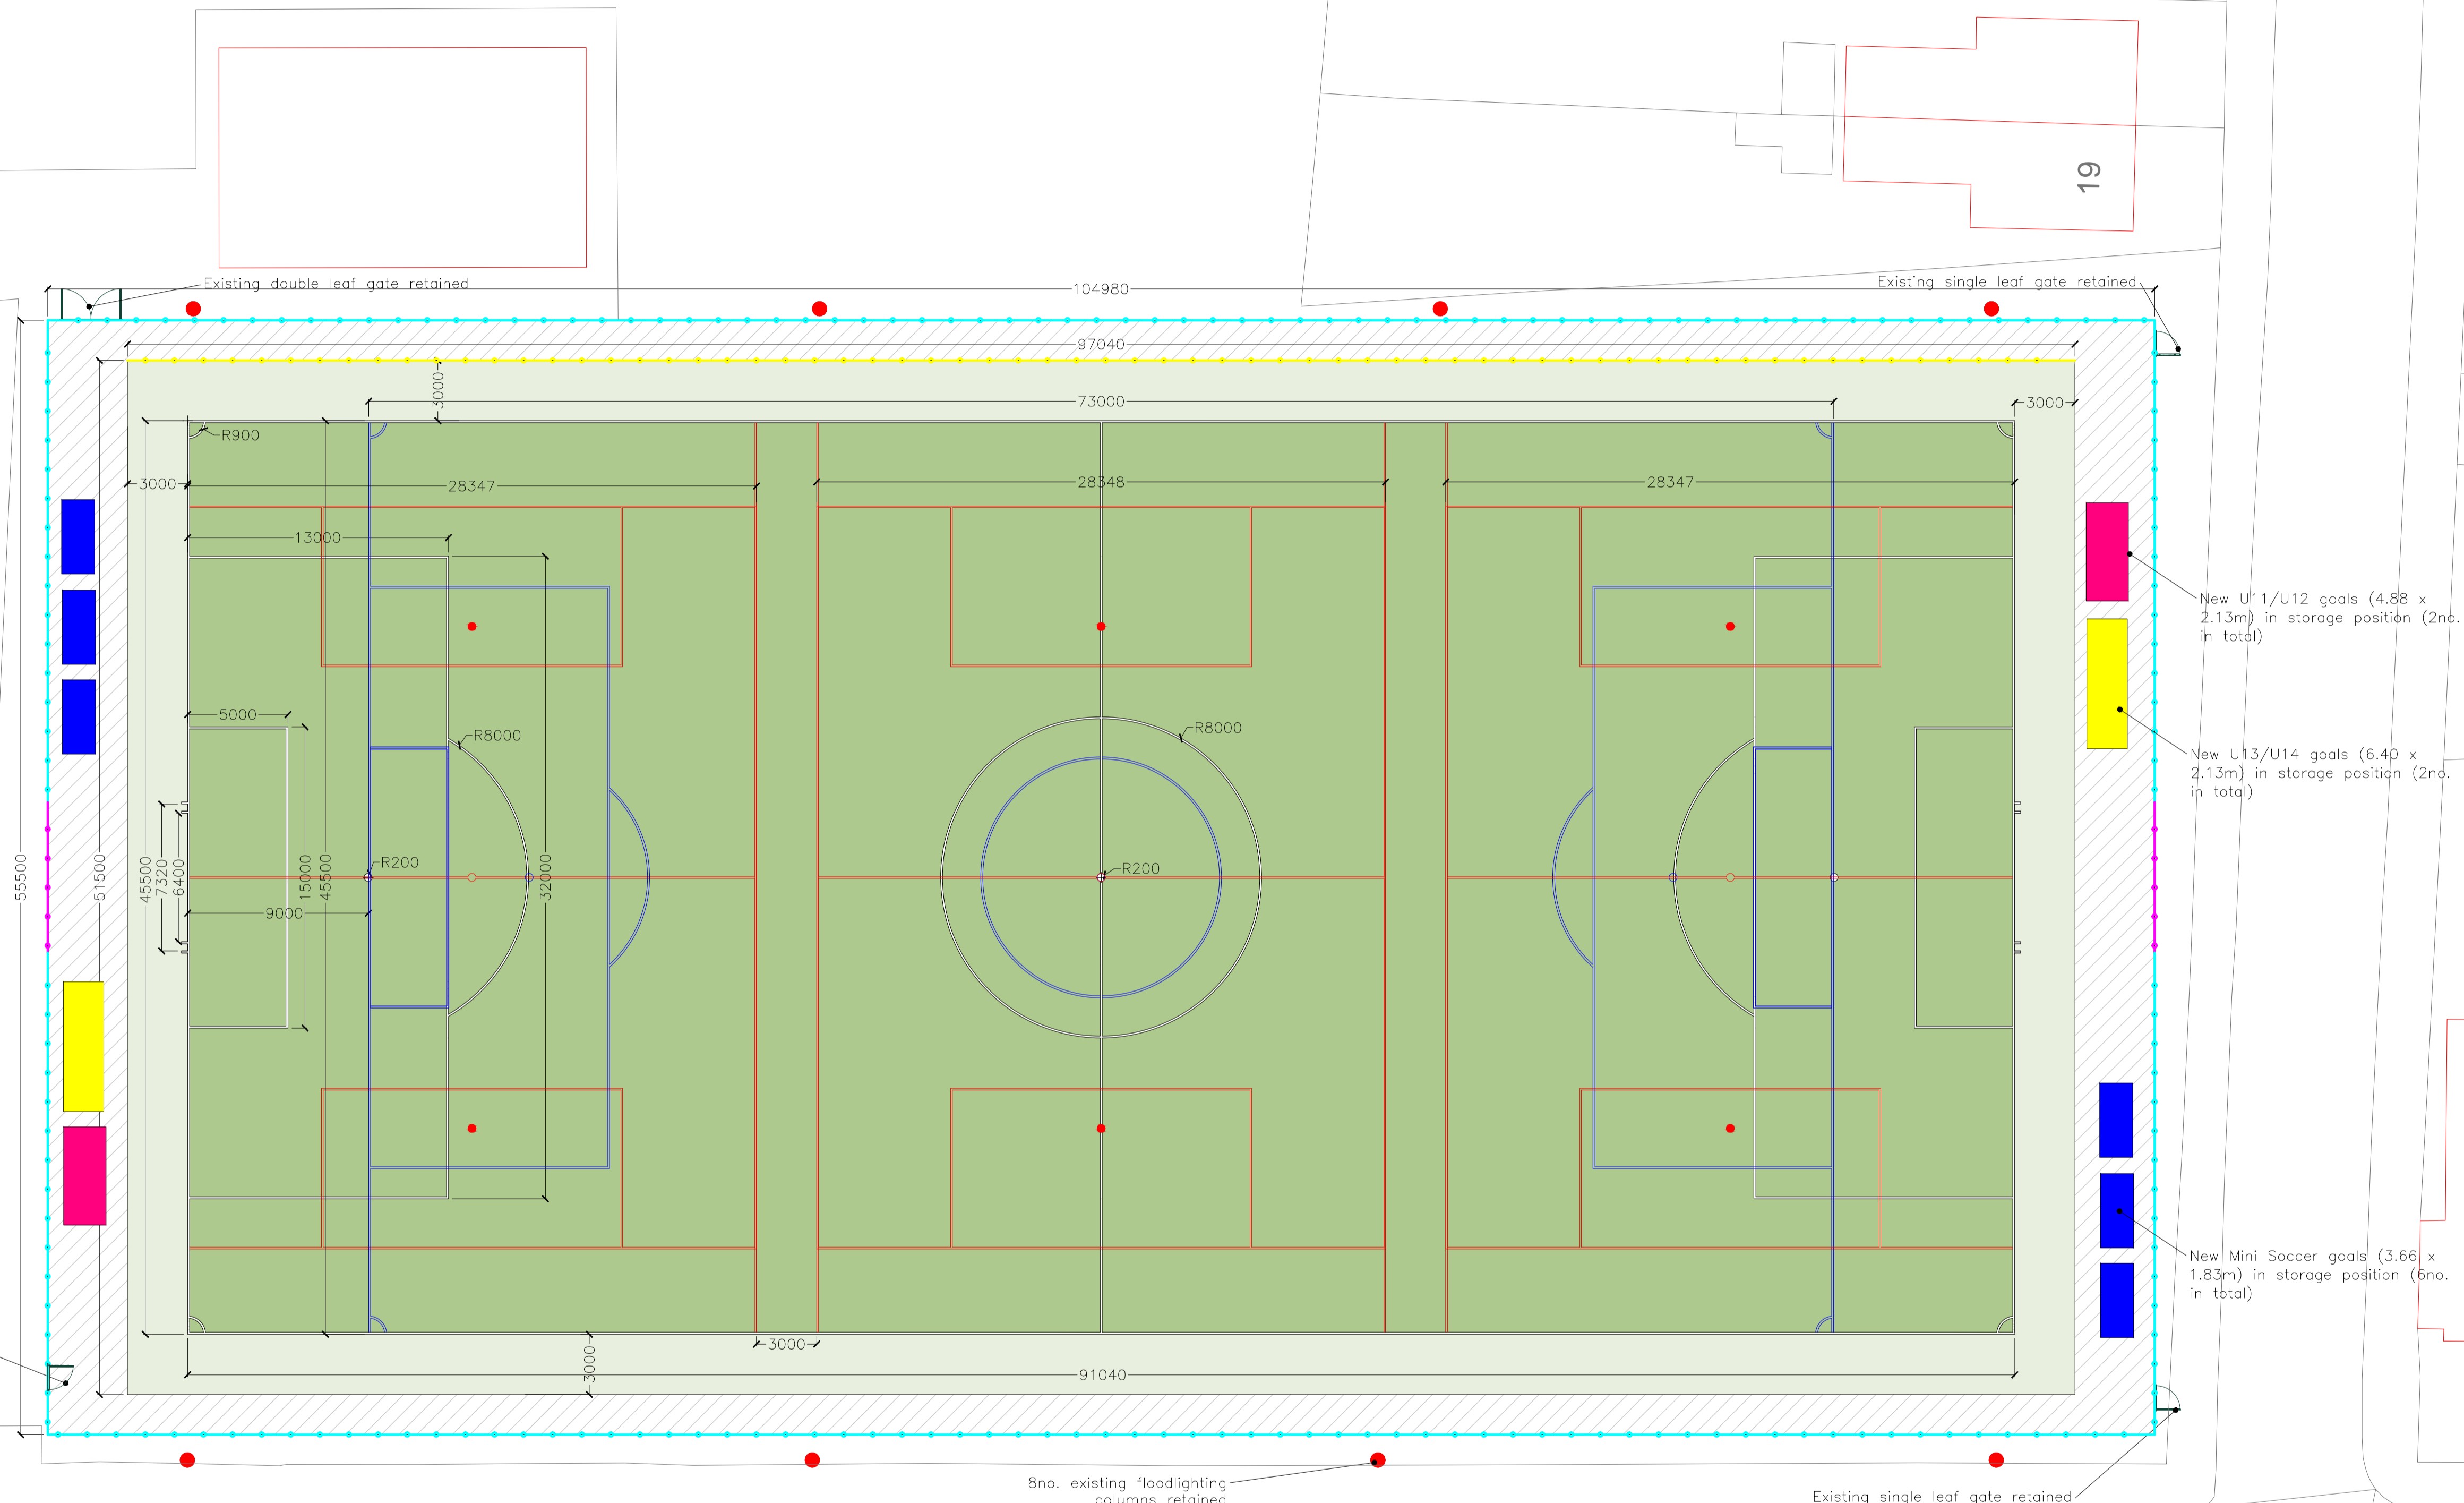

New U11/U12 goals (4.88 x 2.13m) in storage position (2no. in total)

New U13/U14 goals (6.40 x 2.13m) in storage position (2no. in total)

New Mini Soccer goals (3.66 x 1.83m) in storage position (6no. in total)

8no. existing floodlighting columns retained

Existing single leaf gate to be retained and re-hung such that the gate is reversed with an opening direction into the pitch enclosure



Permanent Line Markings:
1no. 91.04m x 45.50m 11v11 youth U13/14 pitch markings (White)

Optional Extra Markings for:
1no. 73m x 45.50m 9v9 youth U11/12 pitch markings (blue)
3no. 37m x 28.347m 5v5 mini soccer U7/8 pitch markings (red)


Fencing Arrangement:

Option 1
Retain 1.8m high rebound boards onto fencing to Northern and Eastern pitch perimeter.
Retain mesh fencing to full pitch perimeter.
Repair mesh fencing where necessary (particular area of concern to Eastern perimeter).

Option 2
Remove and dispose off site the existing 1.8m high rebound boards to Northern and Eastern pitch perimeter.
Remove and dispose offsite existing 2.0m high mesh fencing containing 200x50mm aperture to full pitch perimeter.
Supply and install new existing 2.0m high mesh fencing containing 1.2m high resistance mesh with 60x50mm aperture and 0.80m standard mesh with 200x50mm aperture to full pitch perimeter.

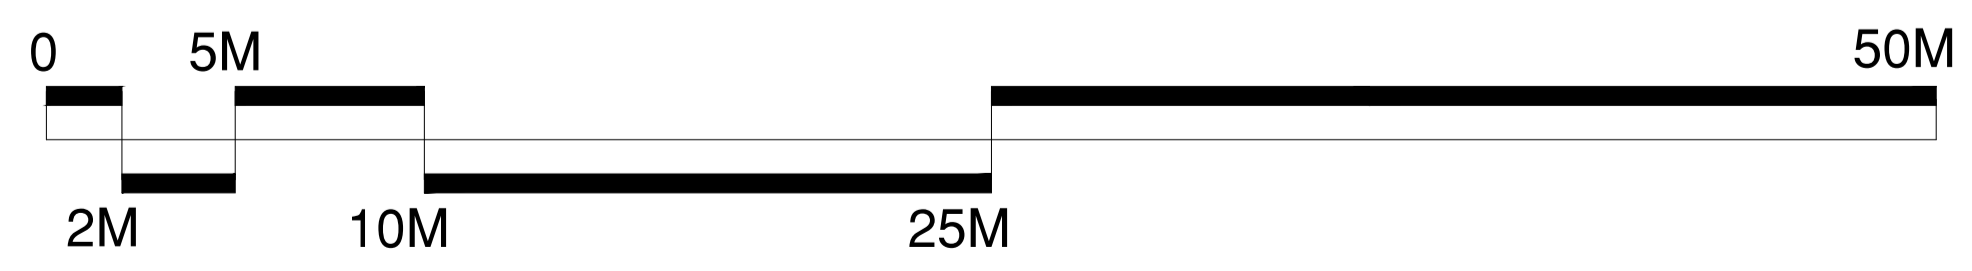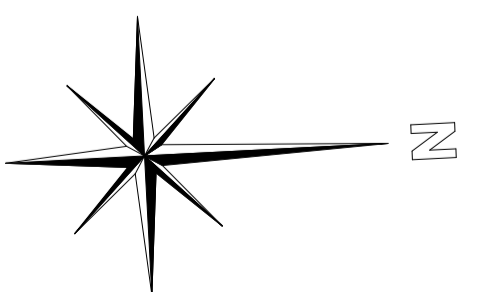

REV	DESCRIPTION	WB	03.09.15
00	FEASIBILITY ISSUE		
		BY (CHK)	DATE

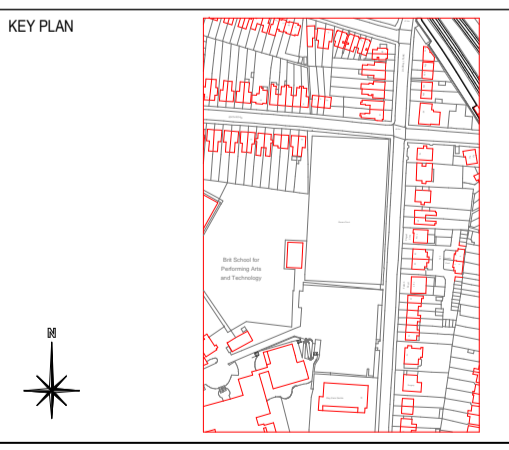

AUTHOR Wesley Bugg		
TITLE Selhurst Sports Arena Refurbishment of an Artificial Turf Pitch Proposed ATP Plan		
PROJECT SS1921	SCALE 1:200	SIZE A1
DRAWING No. F2	REVISION 02	